

FIELDMASTER

• PREMIUM FARM EQUIPMENT •

GMM SERIES



GMM SERIES 3 IN 1 MOWER

AVAILABLE IN 1.8M TO 3.0M WIDTHS



FEATURES

- FOR TRACTORS WITH 30HP +
- FITTED WITH TRIPLE STACK BLADES
- FRONT SAFETY CHAIN
- REMOVABLE REAR MULCH PANELS
- EUROPEAN CAM CLUTCH SET TO 2200NM
- TWIN 5MM LAMINATED CONSTRUCTION
- 2 YEAR WARRANTY

*ALSO AVAILABLE IN 1.6M AND 3.3M MODELS BY REQUEST

FIELDMASTER
• PREMIUM FARM EQUIPMENT •

0800 500 275

sales@fieldmaster.co.nz
www.fieldmaster.co.nz


68 Adams Drive
Pukekohe

SPECS

With an extensive model range covering 7 widths the GM Series mowers meet all your mowing requirements.

A specially designed compact twin and 3-rotor format, with synchronised blade overlap allows for an excellent turning circle and manoeuvrability, plus improved contour following in restricted areas.

Triple-stack mulcher blades as standard on the GMM have a central 100 x 10 and upper and lower knife tips to provide finely chopped mulch material in all conditions. These blades are double-edged and can be rotated for even wear and economical cutting life.

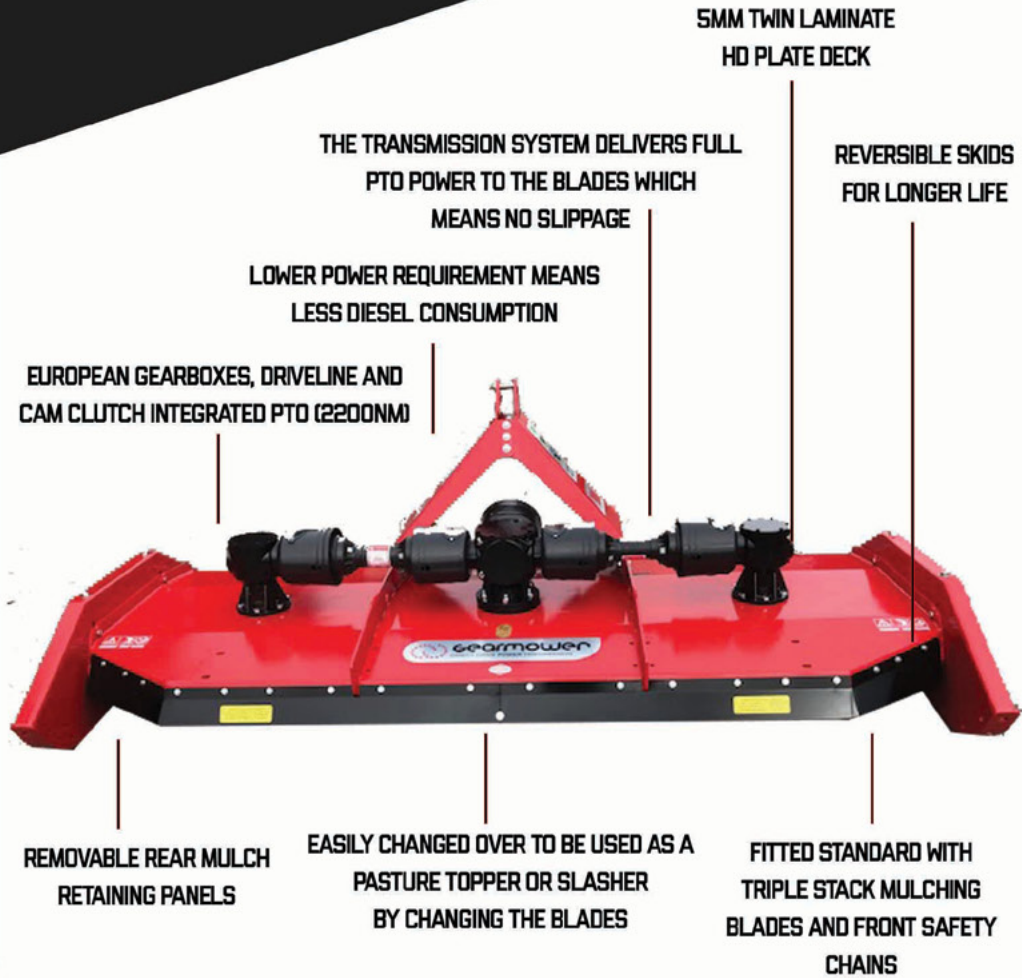

GMM SERIES 3 IN 1 MOWER

AVAILABLE FROM 1.8M TO 3.0M WIDTHS

GMM180 - GMM300

OPTIONS

CUTTING WIDTH	1780MM - 2980MM
CUTTING HEIGHT	20-120MM
WIDTH	1942MM - 3142MM
LENGTH	1440MM - 1765MM
HEIGHT	1050MM
WEIGHT (WITH PTO SHAFT)	690KG - 880KG
HP REQUIREMENT	30-130HP
BLADE THICKNESS	10MM
BLADE SETUP STD	MULCHING BLADES
PTO SPEED	540RPM (GMM300 - 1000RPM)
3 POINT LINKAGE CAT	CAT 2
ROLLER DIAMETER	127MM (OPTIONAL)

- Gold Tip Blades
- Slasher Blades
- Bolt on full width rear roller
- HD Rear Wheel Set
- Front Mount Option
- Rear Chain Guard
- Dual/Offset A Frame
- Mulching Blades as Standard
- HD Anti Scalping Saucers



MULCHING BLADE

Ideal choice for mulching kikuyu, maize stubble and general mowing



SLASHER BLADE

10mm thick blades perfect for heavier work such as clearing gorse and rushes



GOLD TIP BLADE

Fine tipped reversible blade for topping or mowing grass