

FIELDMASTER

• PREMIUM FARM EQUIPMENT •

TM SERIES



TM PARKS MOWER

AVAILABLE IN 240, 270 AND 300 SIZES



FEATURES

- 40-120HP TRACTORS; CAT I-II
- ADJUSTABLE SKIDS
- FLOATING TOP LINK
- GOLD TIP BLADES FOR SHARP FINISH
- HEAVY DUTY LAMINATED TWIN 6MM DECK
- PTO DRIVESHAFT
- RUBBER SAFETY SKIRTS
- MONOCOQUE CHASSIS CONSTRUCTION
- LOW FUEL CONSUMPTION
- 3 SIZES AVAILABLE

FIELDMASTER

• PREMIUM FARM EQUIPMENT •

0800 500 275

sales@fieldmaster.co.nz

www.fieldmaster.co.nz

68 Adams Drive
Pukekohe


SPECS

The TM Series

The TM Series of rotary topper mowers are available in 3 widths.

Wide open grass flow vanes allow for lush pasture to easily pass through coupled with our fine mowing 'Gold Tip' blades that provide a clean cut, adjustable skids, anti-scalping options and the option to have rollers fitted front and rear provide an easy to use customizable machine.

A twin belt drive system coupled with deep groove pulleys ensure maximum power is delivered to the blades providing a great cut every time! Suitable for tractors rated 40-120HP.

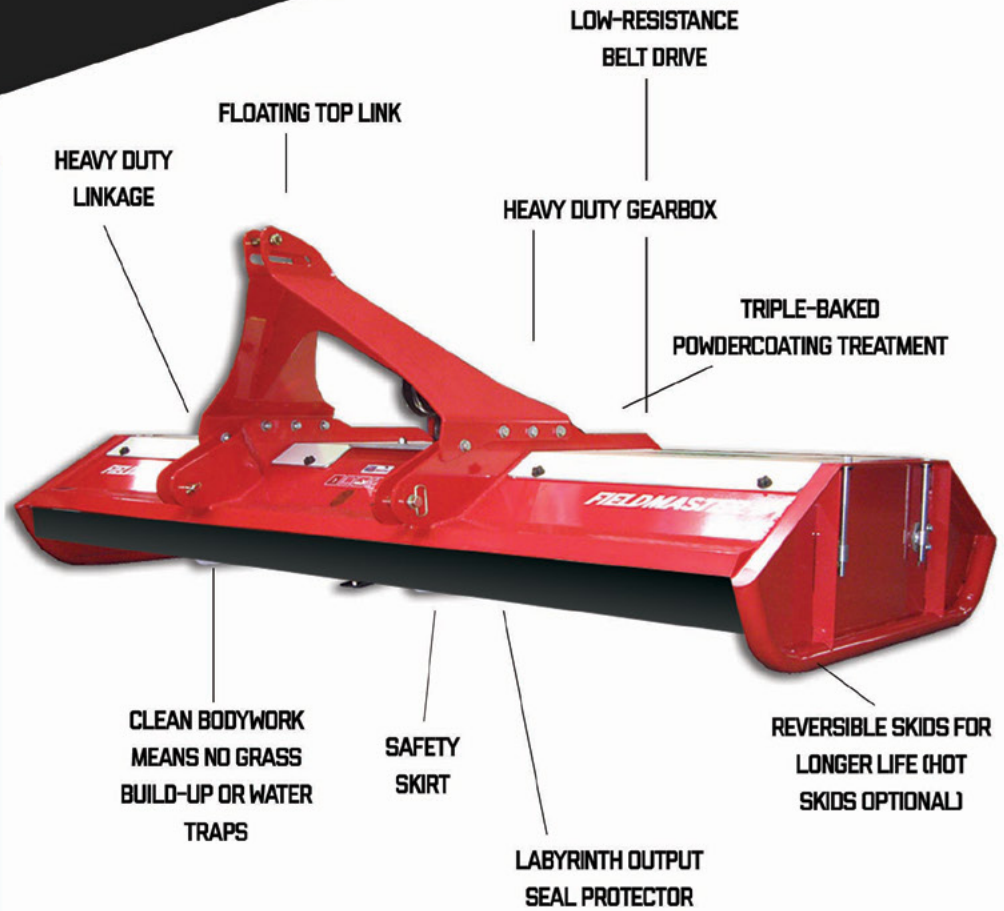

PARKS MOWER

AVAILABLE IN 240, 270 AND 300 SIZES

240

270

300

OPTIONS

CUTTING WIDTH	2345	2645	2945
CUTTING HEIGHT	20-120MM	20-120MM	20-120MM
WIDTH	2540	2840	3170
LENGTH	1575	1575	1575
HEIGHT	1050	1050	1050
WEIGHT (WITH PTO SHAFT)	680KG	720KG	780KG
HP REQUIREMENT	40-120HP	40-120HP	40-120HP
BLADE THICKNESS	4MM	4MM	4MM
BLADE SETUP STD	6X GOLD TIP	8X GOLD TIP	8X GOLD TIP
PTO SPEED	540RPM	540RPM	1000RPM
3 POINT LINKAGE CAT	CAT 2	CAT 2	CAT 2
OPTIONAL ROLLER DIAMETER	125MM	125MM	125MM

- Full width rear roller
- 'Hot skid' heat treated skid wear plates
- Front anti-scalp skids
- Anti-scalp saucers
- Rear rubber safety skirt
- Friction clutch